




- HID alternative or replacement.
- High efficiency Reflector optic system was designed specifically for aisle lighting.
- White Straight Blade Baffle.
- Replaces 250 or 400 watt MH.
- Up to 50% energy savings compared to equivalent metal halide luminaire.
- Surface, stem, or chain mountable.
- High reflectance internal reflector.
- Available with 2, 3 or 4 lamps in nominal 4' and 8' tandem.
- Optional uplight component.
- Uses T5, T8 or Biax lamps.

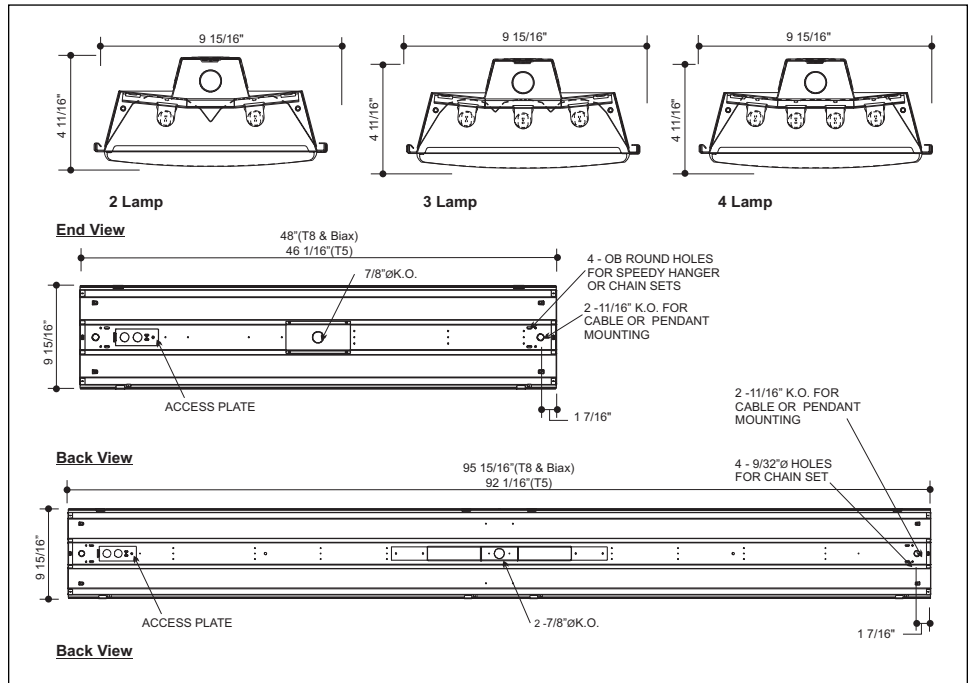

APPLICATIONS

Aisle Lighting for Big Box Retail Stores / Manufacturing Areas / Large Storage Rooms / Warehouse

GENERAL DESCRIPTION

Specification grade, fluorescent industrial fixture. Lighting distribution and energy efficiency makes this luminaire ideal as an HID substitute. Fluorescent lamps offer instant warm up and restrike as well as maintained lumen output. For use in indoor applications where high efficiency, high performance and ease of installation are required. Suitable for surface or suspended mounting individually or in continuous rows. High ceiling application. Locking lampholders are standard.

CONSTRUCTION

Die and brake formed, 22 gauge cold rolled steel housing assembly. Knock out is provided for single stem mounting (3/4" rigid pipe). Optional stem and canopy sets are available in multiples of six inches.

MOUNTING

Optional dual hooks and mounting channel assembly, to be used wherever uniform fixture alignment within rows is critical. Ideal for new installations. Provision for chain mounting included.

FINISH

Powder painted white housing. High reflectivity coated, reflecting surfaces for improved efficiency.

OPTICS

Standard reflectors are solid and are coated with a durable, high reflectance white finish. Fixtures come standard with white straight blade baffle. Optional RM4 reflectors are made of 95% specular aluminum.

ELECTRICAL

All electrical components are UL or CSA approved. Locking lampholders are standard for secure lamp retention. Electronic ballast is standard. The standard voltage is 120V, 60 Hz, or as specified. Units suitable for multi-voltages and 50-60 Hz are also available. See Product Selection for optional ballasts. Sufficient knockouts are provided on the back and ends for connections and through wiring.

APPROVALS

Approved to UL and CSA standards.



