


FLUORESCENT VAPOR PROOF

Vapor Proof Luminaire

- Dust and moisture resistant.
- IP67 Rating (Polycarbonate Housing).
- IP65 Rating (Fibreglass Housing).
- High impact DR acrylic or injection molded polycarbonate diffuser held with positive cam latches.
- Continuous poured in place gasket.
- Suitable for indoor or outdoor applications.
- Uses T5 or T8 lamps.

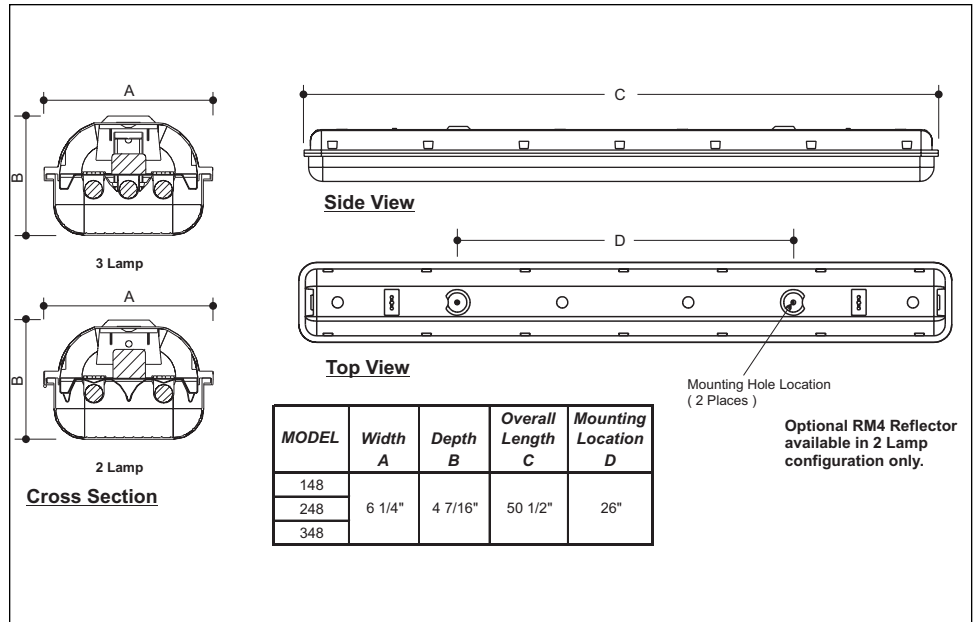

APPLICATIONS

Parking Garages / Garage and Workshops / Canopies / Carwash / Cold Storage / Food Processing / Wet and Damp Environments / Dusty Environments / Agricultural or horticultural buildings.

GENERAL DESCRIPTION

Specification grade, IP65 or IP67 fluorescent enclosed and gasketed fixture. For use in both indoor and outdoor applications where dust and moisture resistance is required. Available in 4 foot length.

CONSTRUCTION

Continuous poured in place gasket. IP67 Diffuser snaps into housing for easy installation and re-lamping. IP65 Diffuser held with Positive Cam Latch. Hole is 7/8" diameter and is provided with two EPDM rubber caps.

MOUNTING

Offset mounting pads which keeps luminaire level and slightly off of mounting surface, are formed within the housing.

FINISH

High reflectivity coated, reflecting surfaces for improved efficiency.

OPTICS

IP65 housing available with molded polycarbonate diffuser or high impact acrylic diffuser with textured pattern designed for high efficiency while providing reduced glare. Smooth surface faces outwards. IP67 Diffuser is Texture Polycarbonate.

ELECTRICAL


All electrical components are UL or CSA approved. Ballasts and lamp holders are replaceable without removing the luminaire from the mounting surface. Electronic Ballast is Standard. The standard voltage is 120V, 60 Hz, or as specified.

APPROVALS

Approved to UL and CSA standards.

OPTIONS • 95% Specular Aluminum Reflector.

ACCESSORIES • Stainless Steel Latches.

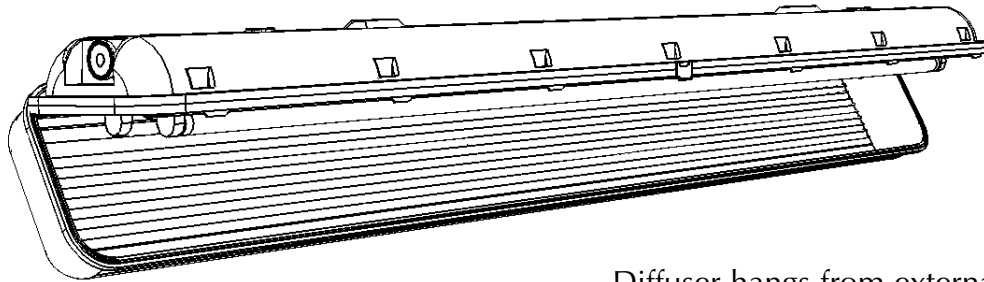

Diffuser hangs from external hooks of housing for easy maintenance when re-lamping (IP67 only).

ORDERING KEY

